


Outdoor light without sensor

L 810 C

Anthracite
EAN 4007841 079307
Article number 079307



Up-/Downlight

LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



IP44

50-100%

50 - 100% main light brightness



connectable via bluetooth



Settings via App



Light source not exchangeable



Control gear not exchangeable



outdoor light

Function description

Elegant and clear. The L 810 C up/downlight without sensor is an exceptionally elegant LED outdoor light. It is a marriage between sophisticated product design and durable material quality (aluminium). Warm white light (3,000 K) with 679 lm at just 9,8 W ensures an inviting lighting mood. It can be interconnected with the sensor version in a flash via Bluetooth, or alternatively can be used as an elegant stand-alone solution.

Technical specifications

Dimensions (L x W x H)	145 x 230 x 91 mm	Mains power supply	220 – 240 V / 50 – 60 Hz
With lamp	Yes, LED lamp	Output	9,8 W
Manufacturer's Warranty	3 years	Mounting height max.	2,50 m
Settings via	App, Bluetooth	Transmitter power	< 1 mW
With remote control	No	Luminous flux total product	679 lm
Version	Anthracite	Measured luminous flux (360°)	679 lm
PU1, EAN	4007841079307	Total product efficiency	69 lm/W
Application, place	Outdoors	Colour temperature	3000 K
Application, room	garden, front door, courtyard & driveway, all round the building, terrace / balcony	Lamp	LED cannot be replaced
Colour	Anthracite	Service life LED L70B50 (25°)	> 60000 h
includes sheet of self-adhesive numbers	No	Base	without
Installation site	wall	LED cooling system	Active and Passive Thermo Control
Impact resistance	IK03	Soft light start	Yes
IP-rating	IP44	Interconnection	Yes
Protection class	II	Interconnection via	Bluetooth
		Colour Rendering Index CRI	= 82

<https://www.steinel.de>

Subject to technical modifications

01.2023 Page 1 from 2

Outdoor light without sensor

L 810 C

Anthracite
EAN 4007841 079307
Article number 079307




Technical specifications

Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal


Optimum mounting height 2 m

Detection Zone

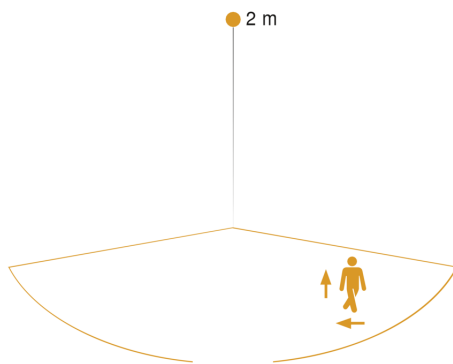

Mögliche Montagehöhe: 1,80 m – 2,50 m
Orange: radial und tangential

Dimension Drawing

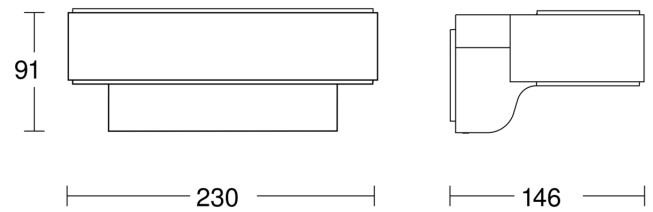

Circuit diagram Bluetooth

