

Outdoor light without sensor

L 605

without motion detector
EAN 4007841 069506
Article number 069506



LED

long life LED 50.000 h



outdoor light

3000 K

3000K warm-white



IP44



Light source not exchangeable



CE

Function description

Powerful external impact. The attractive L 605 outdoor light without sensor with warm white 3000 K, 729 lm, and elegant soft light start can be assembled at the speed of light to enhance any wall. The high-quality aluminium base forms a solid base for the sophisticated cylinder made of fine opal glass, which ensures even and soft light distribution. Consumption: 11,3 W. Perfectly complements the L 605 S with sensor and the L 620 CAM camera light.

Technical specifications

Dimensions (L x W x H)	131 x 78 x 260 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
With remote control	No
Version	without motion detector
PU1, EAN	4007841069506
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-10 – 40 °C
Housing material	Aluminium

Output	11,3 W
Life expectancy of power supply unit (max. °C)	36000 h
Average rated life expectancy of power supply unit at 25°C	> 36000 h
Photo-cell controller	No
Luminous flux total product	729 lm
Measured luminous flux (360°)	729 lm
Total product efficiency	64,5 lm/W
Colour temperature	3000 K
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	36000 h
Service life LED L70B50 (25°)	> 36000 h
Base	without
LED cooling system	Passive Thermo Control
Soft light start	No
Twilight setting TEACH	No
Interconnection	No

<https://www.steinel.de>

Subject to technical modifications

02.2023 Page 1 from 2

Outdoor light without sensor

L 605

without motion detector
EAN 4007841 069506
Article number 069506




Technical specifications


Cover material	Glass opal
Mains power supply	220 – 240 V / 50 – 60 Hz

Colour Rendering Index CRI	= 82
----------------------------	------

Dimension Drawing

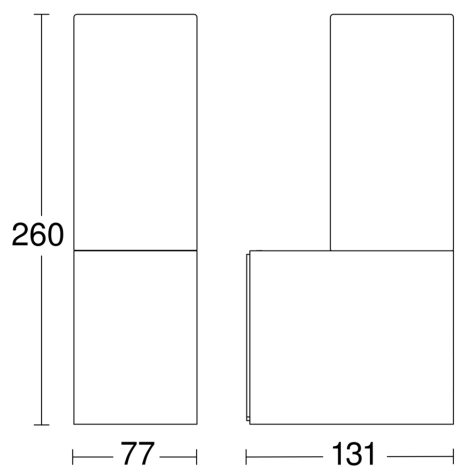

Circuit diagram



Circuit diagram

