


Sensor-switched LED floodlight

Spot Garden SC

Sensor Connect
EAN 4007841 058685
Article number 058685

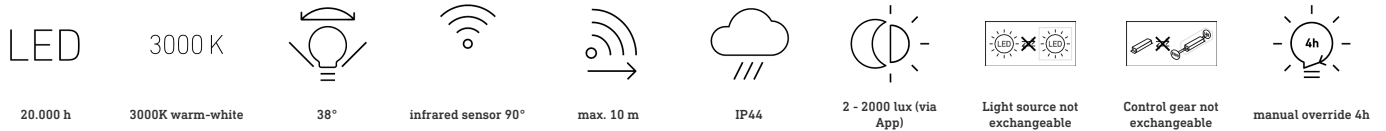

Function description

Interconnected garden enjoyment. The Spot Garden SC ground spotlight with 90° infrared sensor simply pushes into the earth and provides versatile illumination all around the home. The LED spot is conveniently set, interconnected and controlled via Bluetooth by app. ON and OFF times, twilight and time settings as well as creating lighting group – all not a problem. 512 lm, 7,9 W, 3000 K. Includes 2.5 m mains plug and GU-10 LED.

Technical specifications

Dimensions (L x W x H)	140 x 69 x 369 mm	Mechanical scalability	No
With lamp	Yes, LED lamp	Reach, radial	r = 2 m (3 m ²)
With motion detector	Yes	Reach, tangential	r = 10 m (79 m ²)
Manufacturer's Warranty	3 years	Photo-cell controller	Yes
Settings via	Bluetooth	Luminous flux total product	512 lm
Version	Sensor Connect	Measured luminous flux (360°)	512 lm
PU1, EAN	4007841058685	Total product efficiency	64,8 lm/W
Application, place	Outdoors	Colour temperature	3000 K
Application, room	outdoors, garden	Colour variation LED	SDCM5
Colour	Anthracite	Lamp	LED can be replaced
Includes corner wall mount	No	Soft light start	No
Installation site	Ground spike	Continuous light	selectable, 4h
Installation	Ground spike	Functions	Manual ON / ON-OFF, Timer, Master/slave override
Impact resistance	IK03	Twilight setting	2 – 2000 lx
IP-rating	IP44	Time setting	5 s – 60 Min.
Protection class	I	Basic light level function	No
Ambient temperature	-20 – 40 °C		

<https://www.steinel.de>

Subject to technical modifications

02.2023 Page 1 from 2

Sensor-switched LED floodlight

Spot Garden SC

Sensor Connect

EAN 4007841 058685

Article number 058685




Technical specifications

Housing material	Aluminium
Cover material	Plastic, transparent
Mains power supply	220 – 240 V / 50 – 60 Hz
Slave modeselectable	Yes
Sneak-by guard	No
Capability of masking out individual segments	No
Electronic scalability	No

Main light adjustable	No
Twilight setting TEACH	Yes
Interconnection	Yes
Interconnection via	Bluetooth
Output	7,9 W
Colour Rendering Index CRI	= 81
Detection angle	90 °

Detection Zone



Mögliche Montagehöhe: –
Orange: radial
Schwarz: tangential

Dimension Drawing

